

HYDRAULIC SAUSAGE STUFFERS



Illustrated H26



www.talsanet.com

HYDRAULIC SAUSAGE STUFFERS

- Automatic start and stop
- Sealed Hydraulic Oil System
- Motor protected by thermal overload relay
- **USDA** approved ("S" models)
- Aluminum (A Model)




3 Models: H26, H42, & H52 Ltrs
(55, 80 & 100lbs)



Uniform piston sealing, durable construction



Piston Up

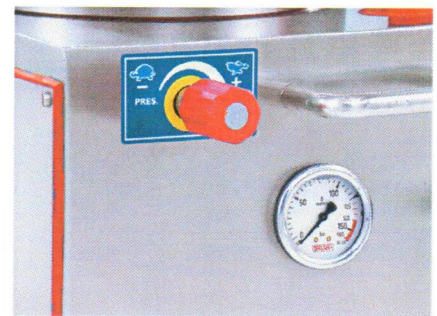

Pressure Knob & Gauge



Conforms to safety & sanitation regulations



Easy to use, knee lever




Optional portioning device 2 oz. to 1 lb.

Barrel capacity, Gal.
 Barrel capacity
 Motor power, 3-phase
 Motor power, 1-phase
 Lid and Piston
 Weight (Net)

	H26A	H26S(USDA)	H42S (USDA)	H52S(USDA)
Barrel capacity, Gal.	7 Gal	7 Gal	11 Gal	13.5 Gal
Barrel capacity	± 55lb	± 55lb	± 80lb	± 100lb
Motor power, 3-phase	1.5HP	1.5HP	2.5HP	2.5HP
Motor power, 1-phase	2.25HP	2.25HP	2.5HP	2.5HP
Lid and Piston	Aluminum	Stainless	Stainless	Stainless
Weight (Net)	± 275lbs	± 315lbs	± 346lbs	± 615lbs

Standard: Automatic motor start and stop by contactor (no manual switch required). Safety voltage switchboard. Internal hydraulic oil reservoir. 3 stainless steel nozzles. Wheels. Electrical thermal overload protection. **Optional:** Portioning device 2 oz. to 1 lb. **USDA H26 option S:** stainless steel lid and piston.

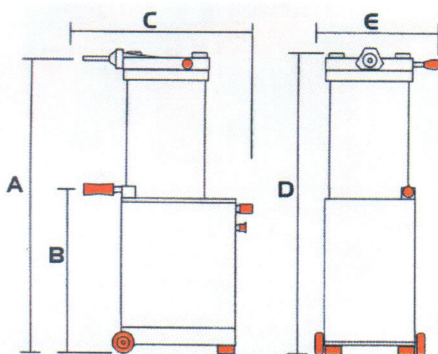

Inch	H26	H42	H52
A	43"	46"	47"
B	24"	26"	26"
C	30"	32"	32"
D	44"	47"	47"
E	18"	20"	21"



808 Rice Street • Suite 2 • St. Paul, MN 55117
 Tel. 800-808-3335 or 651-488-7744 • Fax: 651-488-7727

Distributed By

Model H42S and H52S are USDA approved and only available in stainless steel.